


## BACKFLOW PREVENTER WITH HOSE BIBB

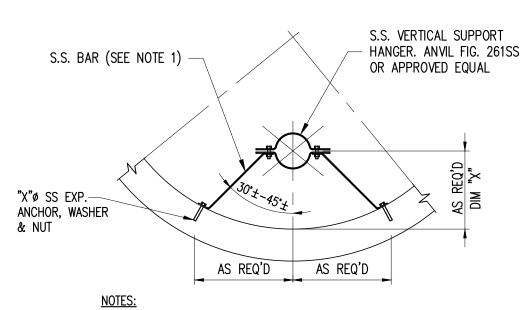

STAINLESS STEEL TO AS 2837-1986: WROUGHT ALLOY STEELS-STAINLESS STEEL BARS AND SEMI-FINISHED PRODUCT GRADE 316 (316 IF WELDED) UNLESS OTHERWISE NOTED.

2. DIM "X" TO BE MEASURED AND CONFIRMED ON SITE

## VERTICAL PIPE SUPPORT DETAIL

## MECHANICAL NOTES:

1). THE STANDARD DRAWINGS PRESENTED ARE BASED ON MINIMUM OF 6" DISCHARGE

2). CONTRACTOR SHALL VERIFY EXISTING UNDERGROUND UTILITIES IN APPLICATIONS, ELEVATIONS, AND QUALITIES PRIOR TO CONSTRUCTION. THE CONTRACTOR SHALL VERIFY EXISTING PIPING TO REMAIN BEFORE ORDERING NEW PIPE AND FITTINGS FOR CONNECTIONS. THE CONTRACTOR SHALL INSPECT AND VERIFY ALL SITE CONDITIONS, DIMENSIONS, ELEVATIONS ETC. AND COORDINATE WITH OTHER TRADES PRIOR TO CONSTRUCTION. WORK SHALL BE SCHEDULED ACCORDING TO SPECIFIED CONSTRUCTION

3). PAY ATTENTION TO AVOID DISTURBING EXISTING ELECTRICAL SERVICE IN THE AREA UNDER CONSTRUCTION (FOR EXISTING FACILITIES ONLY).

4). ALL ELEVATIONS FOR UNDERGROUND UTILITIES SHOWN ARE T.O.P. ELEVATIONS UNLESS OTHERWISE SPECIFIED.

5). ALL PIPING, UNLESS SPECIFIED, TO USE DUCTILE IRON WITH LINING OF SEWER APPLICATION. FITTINGS AND CONNECTIONS UNDERGROUND TO USE MECHANICAL JOINT WITH RESTRAINTS; FITTINGS ABOVE GROUND OR IN VAULT TO USE FLANGE JOINT.


6). PROTECT ALL UNDERGROUND FITTING WITH BOLT CONNECTIONS IN DIRECT CONTACT WITH SOIL WITH TWO COATS OF BITUMASTIC MATERIAL OR APPROVED EQUAL. PROVIDE DIELECTRIC FITTINGS BETWEEN TWO DIFFERENT PIPING MATERIALS.


7). PIPE SUPPORTS SHALL BE HOT-DIP GALVANIZED AFTER FABRICATION. 8). PROPOSED WET WELL SHALL BE CYLINDRICAL TYPE MADE OF REINFORCED

9). PROVIDE SPARK-PROOF CONTACT BETWEEN PUMPS AND GUIDE RAIL SYSTEM.


10). ALL PUMP CONTROLS SHALL BE SET AS PER DESIGN REQUIREMENTS.

CONCRETE WITH DEPTH NO GREATER THAN 24 FEET.

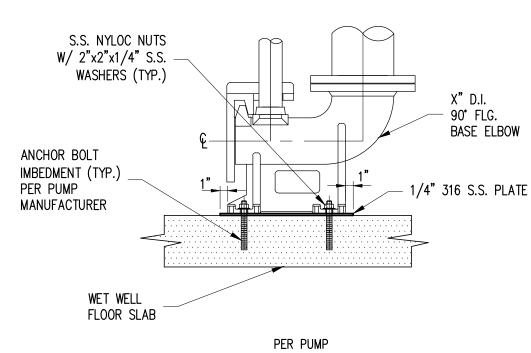

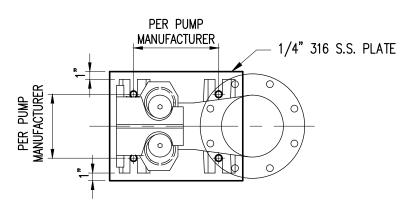

BASE PLATE DETAIL

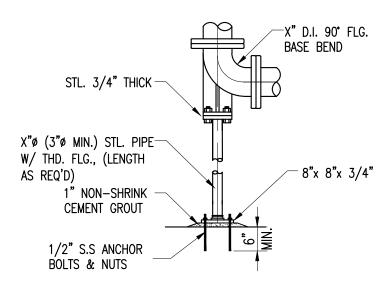

## GALVANIZED PIPE SUPPORT

FLUID INSTALLATION LOCATION			RAW SEWAGE		
			ADDRESS:		
PUMP TYPE		SUBMERSIBLE PUMP			
RATED POINT	CAPACITY, GPN	1	???		
	TDH, FEET		???		
SHUT OFF HEAD, F	<u>T</u>		???		
CONTINUOUS OPERATING RANGE	MAXIMUM TDH, FT		???		
	CAPACITY, GPN	1	???		
	MINIMUM TDH, FT		???		
	CAPACITY, GPM		???		
	NPSHR, FT	,	???		
	PUMP	AT B.E.P., %	???		
	EFFICIENCY	MIN. @ RUNOUT, %	???		
	CASING		CAST IRON CLASS 35B		
	IMPELLER		CAST IRON CLASS 35B		
	SHAFT		AISI 420 S.S.		
PUMP CONSTRUCTION	BEARINGS L-10 LIFE, HRS.		???		
	MAX. SHAFT DEFLECTION IN OPERATING RANGE, MILS		2		
	MAX. VEL. OF VIBRATIONS IN OP. RANGE, INCH/SEC		0.15		
	SUCTION, INCH	IES	-		
	DISCHARGE, IN	ICHES	???		
ELECTRIC MOTOR	RATED HP		???		
	RPM		???		
	VOLTS/PHASE/Hz/S.F.		???		
	AMBIENT TEMP. FOR MOTOR RATING, *C		40		
	MAXIMUM TEMP. RISE, °C		40		
	BEARINGS L-10 LIFE, HRS.		???		
	MAX. VIBRATION AMP., MILS		0.1		
	NOISE LEVEL, dB@1 METER		-		
	NEMA DESIGN CODE LETTER		В		
	START. CURR. LETTER CODE		G		
	INSULATION CLASS		Н		
			VERLOADED AT ANY RFORMANCE CURVE		
MANUFACTURERS PUMP ??? MODEL			?; ??? IMPELLER		
- · · · · <del>- · · -</del>					

ALL PUMP STATION PLANS SHALL BE DRAWN TO SCALE



**DEPARTMENT** 3071 SW 38TH AVENUE MIAMI, FL 33146-1520 305-665-7471

www.miamidade.gov/water ENGINEERING & DESIGN DIVISION 3575 S LE JEUNE RD MIAMI, FL 33146

786-268-5250

Q/ERXOOOOO GENERATOR TE 2015) P <u>≥</u> 2 X-000 c STATION 0. 0000 ( CONTRACT

E PUMPING

STATION NO

PROJECT OF 00000, IERSIBLE MPING SUBMI PUN

_				<u>ノ</u>
	DRAWING	HIST	ORY	
RELEASED FOR			DATE	BY
Χ	REVIEW 90%	06/19/15	LMS	
	REVIEW 00%			
	PERMIT			
	BID			
	AS-BUILT			
	REVIS	SIONS		
No.	DESCRIPTION		DATE	BY
Λ	XXXXXX XXXXXX		06/19/15	JC
	APPR(	JVALS	<u> </u>	
PROJECT MGR:X.X.X. CHECK			ED: X.X.X.	
DESI	GNED: X.X.X.	DRAWN: X.X.X.		
CHIE	F ENGINEER: J.B.	F.		
DESI	GN MNGR.: R.J.	A.		
SEC	TION HEAD: X.X.	Х.		

State of Florida-License No.00000

DATE: 06/19/2015 | SCALE: AS NOTED

DWG. No. X-00000-D

M-1

Date:\_\_\_

NAME: 00000M01.DWG